



| |
|---|
| Casting and Impeller Material: Plastic (UL 94V-O) |
| Bearing system: Ball Bearing (B) Sleeve Bearing (S) |
| Lead Wires: UL 1007 AWG 28 or equivalent. Red:+, Black:-, Sensor: Yellow or White. |
| Model No: X0501512YB X=Bearing system, can be B or S type. Y=Fan speed, can be L, M or H. |
| Options: Auto-restart, FG |
| Net Weight: 22.4g |



50×50×15 mm (1.97"×1.97"×0.59") **Model No. X0501512YB**

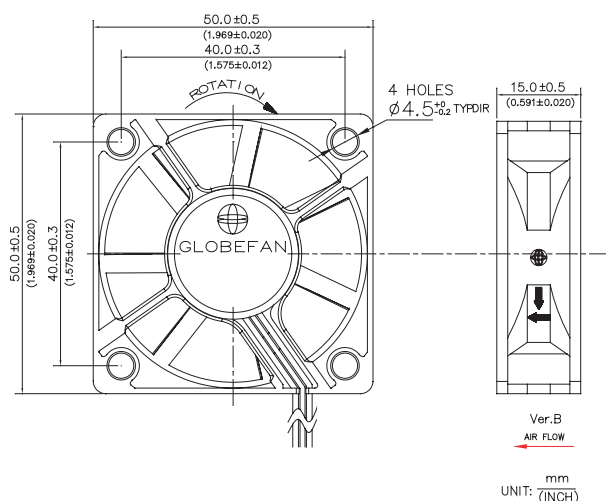

外形圖 外形図 Outline

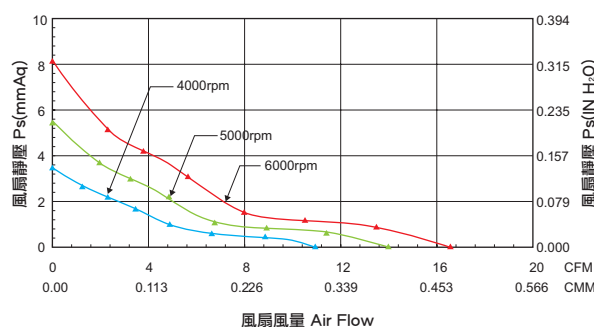

風量, 靜壓特性曲線
風量, 静圧特性カーブ
Characteristic Curves

Specifications

| ITEM | | MODEL NO. | X0501512LB | X0501512MB | X0501512HB |
|-----------------------------|----------------------------|-----------|------------|------------|------------|
| RATED VOLTAGE 定格電圧 | 額定電壓 (V) | | 12 | 12 | 12 |
| OPERATING VOLTAGE 動作電圧 | 操縱電壓 (V) | | 6-13.8 | 6-13.8 | 6-13.8 |
| RATED CURRENT 定格電流 | 額定電流 (A) | | 0.16 | 0.23 | 0.32 |
| STARTING VOLTAGE 起動電圧 | 啟動電壓 (V) | | 6 | 6 | 6 |
| RATED INPUT POWER 定格入力 | 額定功率 (W) | | 1.92 | 2.76 | 3.84 |
| MAX AIR FLOW 最大風量 | 最大風量 (CFM) | | 11.62 | 14.53 | 17.44 |
| | 最大風量 (CMM) | | 0.329 | 0.411 | 0.493 |
| MAX STATIC PRESSURE 最大靜壓 | 最大靜壓 (mmAq) | | 3.72 | 5.82 | 8.38 |
| | 最大靜壓 (IN H ₂ O) | | 0.146 | 0.229 | 0.330 |
| NOISE VALUE 騒音値 | 噪音值 (dBA) | | 26.4 | 31.2 | 35.2 |
| RATED SPEED 回轉數 | 額定轉速 (rpm ± 10%) | | 4000 | 5000 | 6000 |